POWER SERIES

120 lb - Ride-On Spreader \$100-12010 - Stainless Steel Frame

Accu-WayTM System Spread Pattern
190CC Subaru Engine
Hydrostatic (Rear Wheel Drive)
Foot Operated Disc Parking Brake
Spread Width Up to 12'
Seed, Fertilizer, Sand, Ice-Melt
Poly Hopper with Stainless Steel Components

45 lb - Commercial Power Seeder \$120-4510 - Power-Coated Steel Frame

All-In-One Vertical Slicer, Seeder & Dethatcher

Self-Propelled - Hydrostatic Transmission (10) 11 Ga. Heat Treated Steel Blades 270CC Honda Engine Working Width True 20"



120 lb - Electric Spreader

S80-12010 - Stainless Steel Frame

Accu-WayTM System Spread Pattern

12 Volt DC with Variable Speed Control

Foot Pedal / Hand Actuator Gate Control

Spread Width Up to 16'

Seed, Fertilizer, Sand, Ice-Melt

Types of Vehicles UTV, ATV, ZTR

*See manual for details



120 lb - Electric Spreader 2" Receiver Mount Kit

1/4" Steel Plates
2" Square Steel Tubing
12" Height Adjustment
Marine-Grade On-Off Cable
(2) Ratchet Straps for Extra Support
43"(Length) x 24"(Width) x 14"(Height)

120 lb - Drop Spreader P70-12010 - Powder-Coated Frame

Seed, Fertilizer, Sand, Ice-Melt
Variable & Fixed Rate Bottoms Material Flow
Control Rod & Chain
Spread Width 18" or 36"



DEFLECTORS

Side Deflector

Stainless Steel Hardware
Prevents Spread on Sidewalks & Landscaping
Maintains Even Spread Across Spread Band

Full Deflector

Used to Direct Product Downward

Perfect for Spreading Ice Melt & Bagged Salt



OUTPERFORM. OUTLAST.



www.spyker.com

phone: (800) 972-6130 fax: (888) 619-2315 CustomerService@Brinly.com

PRO-SERIES

50 lb - Push Broadcast Spreader P40-5020 - Powder-Coated Frame

Dual Handles
Rust Proof Wheels
Solid Stainless Steel Axle
Accu-Way™ System Spread Pattern
Spread Width Up to 12'
Fully Enclosed Lifetime Warranty Metal Gears
Poly Hopper with Stainless Steel Components
Seed, Fertilizer, Sand, Ice-Melt



50 lb - Push Broadcast Spreader

S40-5020 - Stainless Steel Frame

Dual Handles
Rust Proof Wheels
Solid Stainless Steel Axle
Accu-Way™ System Spread Pattern
Spread Width Up to 12'
Fully Enclosed Lifetime Warranty Metal Gears
Poly Hopper with Stainless Steel Components
Seed, Fertilizer, Sand, Ice-Melt



80 lb - Push Broadcast Spreader

P60-8020 - Powder-Coated Frame

Dual Handles
Rust Proof Wheels
Solid Stainless Steel Axle
Accu-Way™ System Spread Pattern
Spread Width Up to 12'
Fully Enclosed Lifetime Warranty Metal Gears
Poly Hopper with Stainless Steel Components
Seed, Fertilizer, Sand, Ice-Melt



80 lb - Push Broadcast Spreader

S60-8020 - Stainless Steel Frame

Dual Handles
Rust Proof Wheels
Solid Stainless Steel Axle
Accu-Way™ System Spread Pattern
Spread Width Up to 12'
Fully Enclosed Lifetime Warranty Metal Gears
Poly Hopper with Stainless Steel Components
Seed, Fertilizer, Sand, Ice-Melt



PRO-SERIES

120 lb - Push Broadcast Spreader

S60-12020 - Stainless Steel Frame

Dual Handles
Rust Proof Wheels
Solid Stainless Steel Axle
Accu-Way™ System Spread Pattern
Spread Width Up to 12'
Fully Enclosed Lifetime Warranty Metal Gears
Poly Hopper with Stainless Steel Components
Seed, Fertilizer, Sand, Ice-Melt, Top Dressing Material



Rust Proof Wheels

Solid Stainless Steel Axle

Accu-Way™ System Spread Pattern

Spread Width Up to 12'

Fully Enclosed Lifetime Warranty Metal Gears

Poly Hopper with Stainless Steel Components

Seed, Fertilizer, Sand, Ice-Melt



LIGHT DUTY

40 lb - Push Broadcast Spreader P20-9010 - Powder-Coated Frame / Stainless Steel Hopper


Adjustable Handle Height
Rust Proof Wheels
Solid Stainless Steel Axle
Spread Width Up to 12'
Aluminum Gears
Seed, Fertilizer, Sand, Ice-Melt



50 lb - Push Broadcast Spreader P20-5010 - Powder-Coated Frame


Adjustable Handle Height
Rust Proof Wheels
Solid Stainless Steel Axle
Spread Width Up to 12'
Aluminum Gears
Seed, Fertilizer, Sand, Ice-Melt



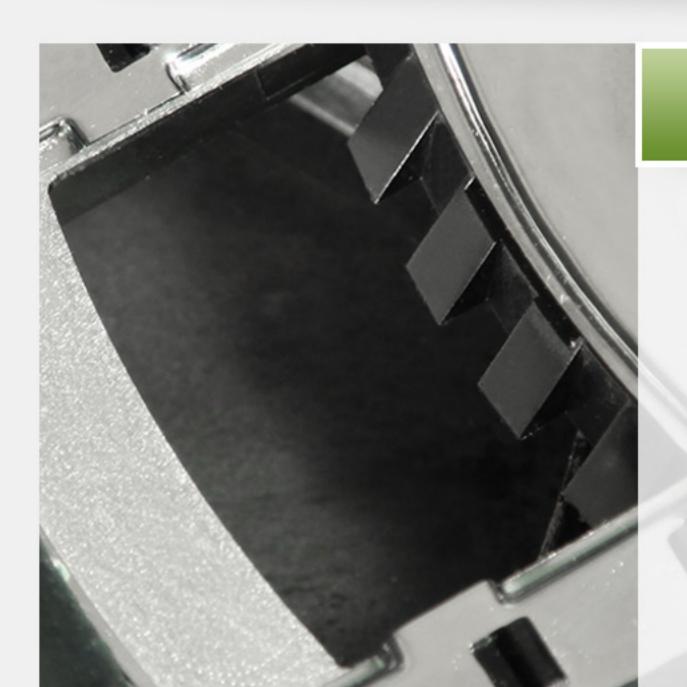


Accu-WayTM

Controls Spread Pattern
Prevents Striping
Adjust on the Fly

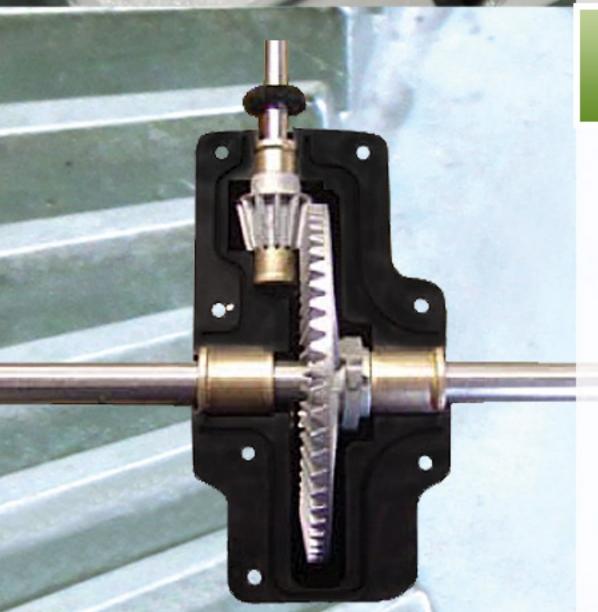

Metal Gear System

Lifetime Warranty
Low Maintenance
Solid Stainless Steel Axle

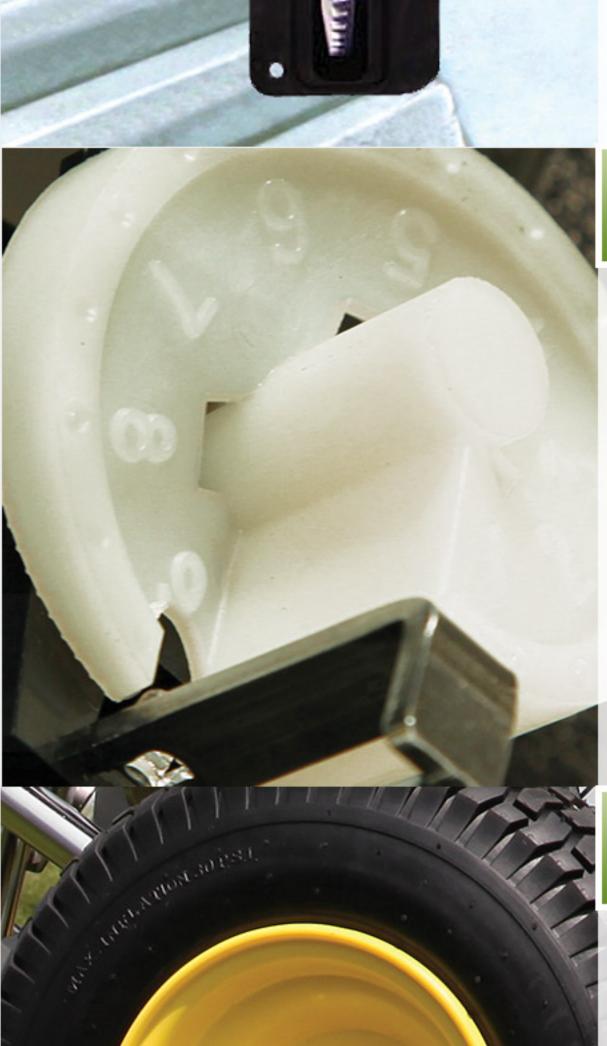

Spyker Dial

Eliminates Waste
90 Settings of Precision
Easy Calibration



Fully Pneumatic
Minimize User Fatigue
Traction for Even Spread



